


### Induction Cooktop



#### PRODUCT SIZE & SPECIFICATIONS

Overall Width	30"
Overall Depth from Rear	21"
Overall Height	
Above top surface of counter	1 1/8"
Below top surface of counter	7" [maximum]
Burner Diameter [4]	9"
Max Power Capacity	10 kW per burner
User Interface	LCD Display Removable Magnetic Knobs LED Burner Rings
Battery Capacity	3 kWh

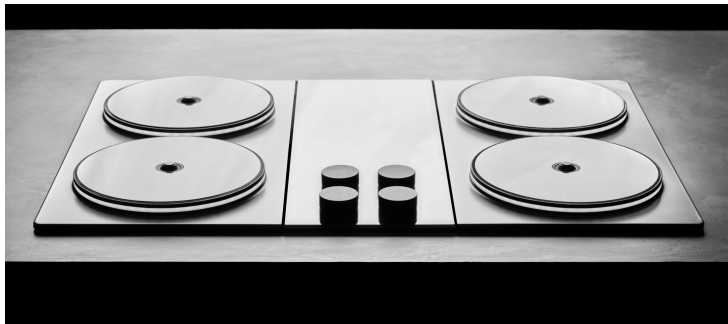

#### CUTOUT SIZE

Cutout Width	28 1/2" - 29 1/2"
Cutout Depth	19 5/16" - 19 5/8"
Clearance from Rear Wall	2 1/2" [minimum]
Clearance from Front Edge of Counter	3" [minimum]
Clearance from Cabinetry on Counter Next to Cooktop	3" [minimum]

#### INSTALLATION SPECIFICATIONS

##### ELECTRICAL

120V / 15A or 240V compatibility

Inverter can support up to 2 kW pulled from AC grid

##### MILLWORK / PHYSICAL CONSTRAINTS

Ventilation hood must be 30" [minimum] above the surface of the burners.

Cooktop must not be installed above refrigerators / freezers, dishwashers, microwaves, or washer / dryers.

We recommend no cabinets directly above the cooktop, but it is possible.

We recommend installing an open cabinet below the stove [e.g. for trash bins and storage] for easy access underneath and full ventilation. A drawer at ground level is also an option.